


CURRENT MODE PWM CONTROL CIRCUITS

DESCRIPTION


The HG **UC3842A/3843A** provide the necessary functions to implement off-line or DC to DC fixed frequency current mode , controlled switching circuits with minimal external components.

FEATURES


- *Low Start Up Current (Typical 0.12mA)
- *Automatic Feed Forward Compensation
- *Pulse-by-Pulse Current Limiting
- *Under-voltage Lockout with Hysteresis
- *Double Pulse Suppression
- *High Current Totem Pole Output to Drive MOSFET Directly
- *Internally Trimmed Band Gap Reference
- *500kHz Operation

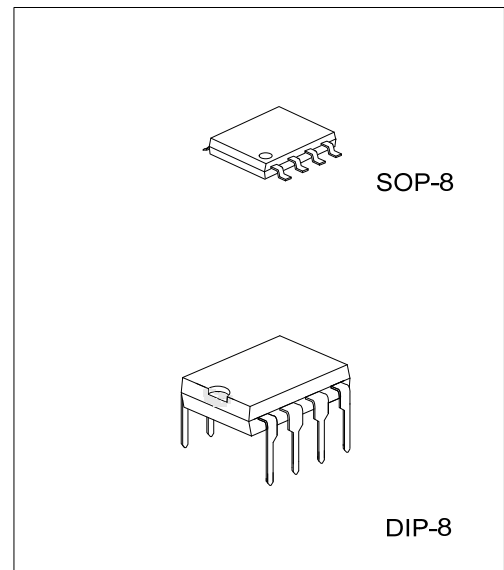

PIN CONFIGURATION

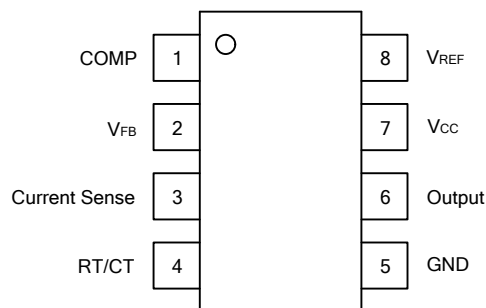

BLOCK DIAGRAM

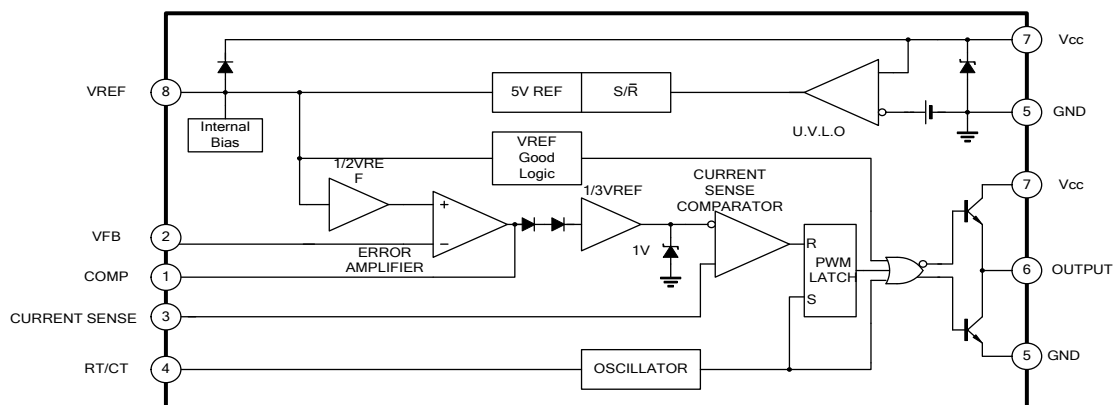

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage(Low Impedance Source)		V _{CC}	30	V
Supply Voltage(I _{CC} <30mA)		V _{CC}	Self Limiting	V
Output Current (Peak)		I _{O(PEAK)}	±1	A
Output Energy (capacity Load)			5	μJ
Analog Inputs(pin 2,3)		V _{I(ANA)}	-0.3 ~ +6.3	V
Error Amplifier Output Sink Current		I _{SINK(EA)}	10	mA
Power Dissipation(Ta≤25°C)	DIP-8	P _D	1.0	W
	SOP-8		0.5	W
Derated at Ta>25°C		P _D	8	mW/°C
Junction Temperature		T _J	+150	°C
Storage Temperature		T _{STG}	-65 ~ +150	°C

Note Absolute maximum ratings are those values beyond which the device which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS

(0°C ≤ Ta ≤ 70°C, V_{CC}=15V, R_T=10kΩ, C_T=3.3nF, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Section						
Output Voltage	V _{REF}	T _J =25°C, I _{OUT} =1mA	4.9	5	5.1	V
Line Regulation	ΔV _{REF}	12 ≤ V _{IN} ≤ 25V		6	20	mV
Load Regulation	ΔV _{REF}	1 ≤ I _{OUT} ≤ 20mA		6	25	mV
Temperature Stability		(Note 1)		0.2	0.4	mV/°C
Total Output Variation		Line, Load, Temp(Note 1)	4.82		5.18	V
Output Noise Voltage	V _{osc}	10Hz ≤ f ≤ 10kHz, T _J =25°C (Note 1)		50		μV
Long Term Stability		Ta=25°C, 1000Hrs(Note 1)		5	25	mV
Output Short Circuit	I _{SC}		-30	-100	-180	mA
Oscillator Section						
Initial Accuracy	f	T _J =25°C	47	52	57	kHz
Voltage Stability	Δf/ΔV _{CC}	12 ≤ V _{CC} ≤ 25V		0.2	1	%
Temperature Stability		T _{min} ≤ Ta ≤ T _{max} (Note 1)		5		%
Amplitude	V _{osc}	V _{pin 4} peak to peak		1.7		V
Error Amplifier Section						
Input Voltage	V _{I(EA)}	V _{pin 1} =2.5V	2.42	2.50	2.58	V
Input Bias Current	I _{I(BIAS)}			-0.3	-2	μA
AVOL		2 ≤ V _{OUT} ≤ 4V	60	90		dB
Unity Gain Bandwidth		T _J =25°C (Note 1)	0.7	1		MHz
PSRR		12 ≤ V _{CC} ≤ 25V	60	70		dB
Output Sink Current	I _{O(SINK)}	V _{pin 2} =2.7V, V _{pin 1} =1.1V	2	6		mA
Output Source Current	I _{O(SOURCE)}	V _{pin 2} =2.3V, V _{pin 1} =5V	-0.5	-0.8		mA
V _{OUT} High	V _{OH}	V _{pin 2} =2.3V, R _L =15kΩ to GND	5	6		V
V _{OUT} Low	V _{OL}	V _{pin 2} =2.7V, V _{pin 1} =1.1V		0.7	1.1	V

■ ELECTRICAL CHARACTERISTICS(Cont.)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Current Sense section							
Gain		G _V	(Note 2,3)	2.85	3	3.15	V/V
Maximum Input signal		V _{I(MAX)}	V _{pin 1} =5V(Note 2)	0.9	1	1.1	V
PSRR			12 ≦ V _{CC} ≦ 25V		70		dB
Input Bias Current		I _{BIAS}			-2	-10	μA
Delay to Output			V _{pin 3} =0 to 2V		150	300	ns
Output Section							
Output Level	Low	V _{OL}	I _{O(SINK)} =20mA		0.1	0.4	V
			I _{O(SINK)} =200mA		1.5	2.2	V
	High	V _{OH}	I _{O(SOURCE)} =20mA	13	13.5		V
			I _{O(SOURCE)} =200mA	12	13.5		V
Rise Time		t _R	T _J =25°C,C _L =1nF(Note 1)		50	150	ns
Fall Time		t _F	T _J =25°C,C _L =1nF(Note 1)		50	150	ns
Under-Voltage Lockout Output Section							
Start Threshold	3842A	V _{TH(ST)}		14.5	16	17.5	V
	3843A			7.8	8.4	9	V
Min. Operating Voltage	3842A	V _{OPR(MIN)}	After Turn On	8.5	10	11.5	V
	3843A			7	7.6	8.2	V
PWM Section							
Duty Cycle	MAX	D _(MAX)		95	97	100	%
	Min	D _(MIN)				0	%
Total Standby Current							
Start-up Current		I _{ST}			0.12	0.3	mA
Operating Supply Current		I _{CC(OPR)}	V _{pin 2} =V _{pin 3} =0V		11	17	mA
V _{CC} Zener Voltage		V _Z	I _{CC} =25mA		34		V

Note:1. These parameters, although guaranteed, are not 100% tested in production.


2. Parameters measured at trip point of latch with Vpin 2=0.

3. Gain defined as:

$$A = \frac{\Delta V_{pin 1}}{\Delta V_{pin 3}} ; 0 \leq V_{pin 3} \leq 0.8V$$


4. Adjust V_{CC} above the start threshold before setting at 15V.

■ OPEN-LOOP LABORATORY TEST FIXTURE

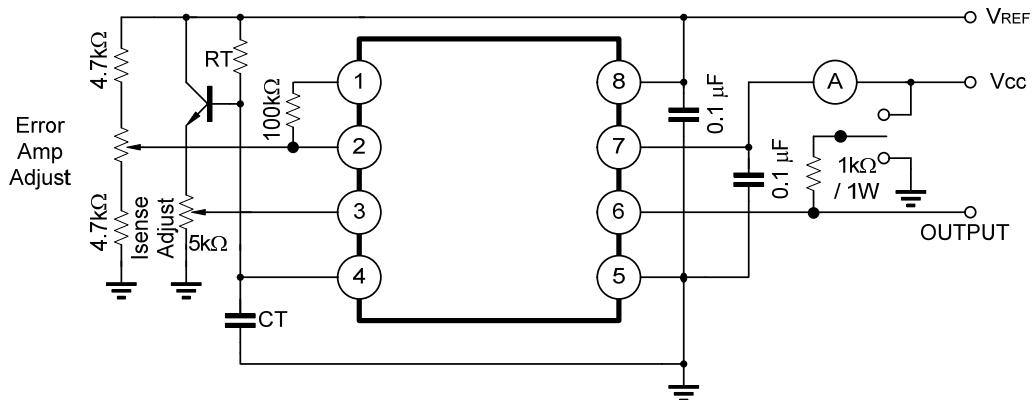


High peak current associated with capacity loads necessitate careful grounding techniques. Timing and bypass capacitors should be connected close to pin 5 in single point GND. The transistor and 5kΩ potentiometer are used to sample the oscillator waveform and apply an adjustable Ramp to Pin 3.

■ UNDER-VOLTAGE LOCKOUT

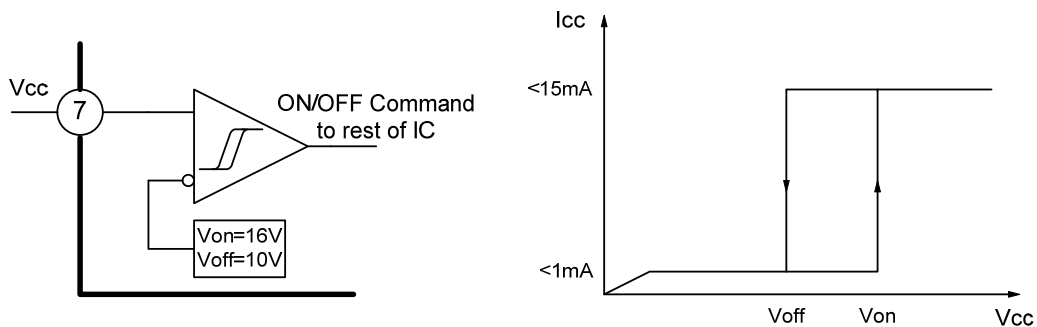


During Under-Voltage Lockout, the output driver is biased to a high impedance state. Pin 6 should be shunt to GND with a bleeder resistor to prevent activating the power switch with output leakage currents.

■ ERROR AMPLIFIER CONFIGURATION

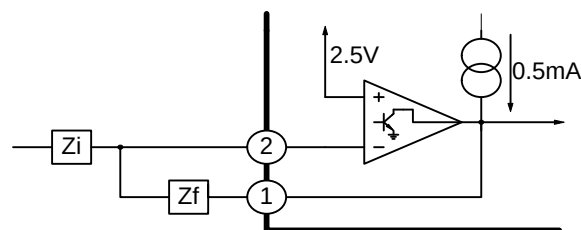


Error amplifier can source or sink up to 0.5mA

■ CURRENT SENSE CIRCUIT

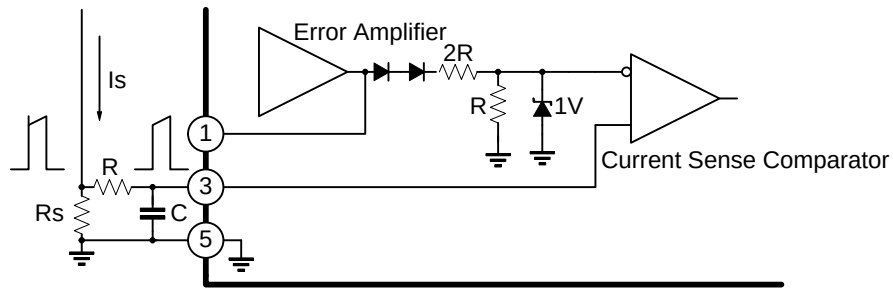




Peak current (I_s) determined by the formula: $I_{smax} = 10V/R_s$.
A small RC filter be required to suppress switch transients.

■ SLOPE COMPENSATION

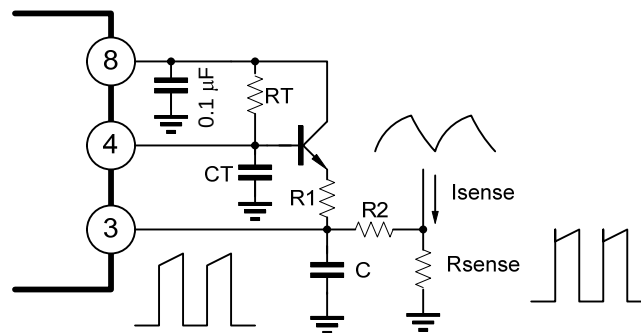


A fraction of the oscillator ramp can be resistively summed with the current sense signal to provide slope compensation for converts requiring duty cycles over 50%. Note that capacitor C, forms a filter with R2 to suppress the leading edge switch spikes.

■ OSCILLATOR SECTION

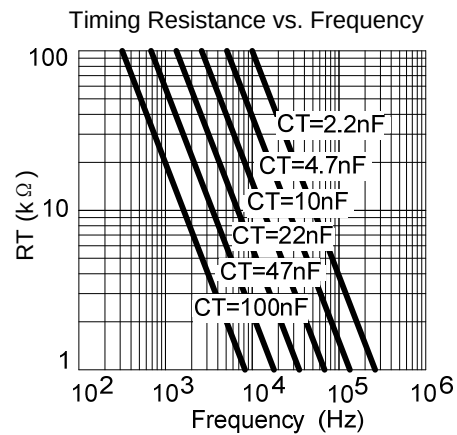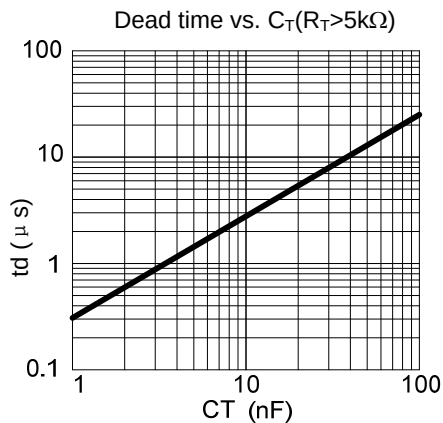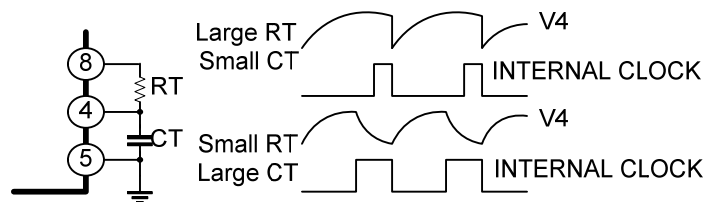


■ TYPICAL CHARACTERISTICS


Output Saturation Characteristics

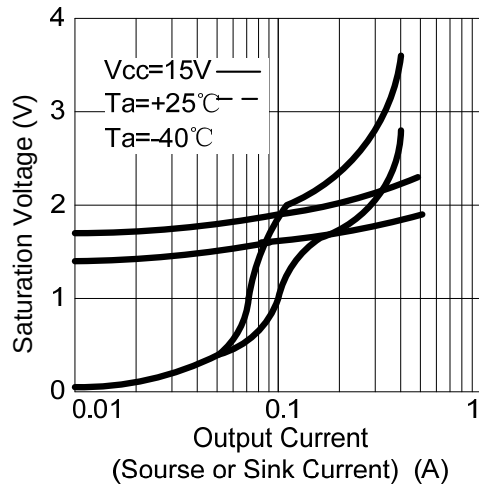


Error Amplifier Open-Loop Frequency Response

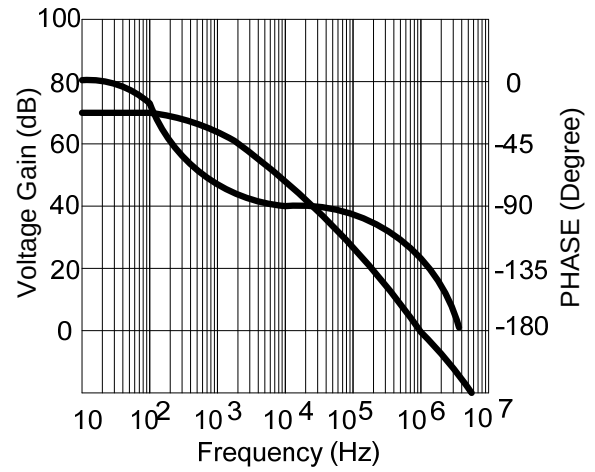

V_{REF} Temperature Drift

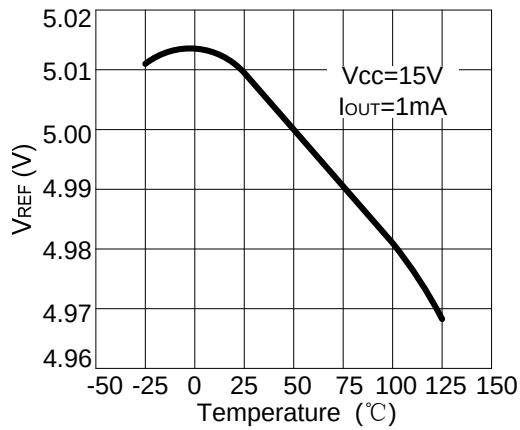

I_{start} Temperature Drift

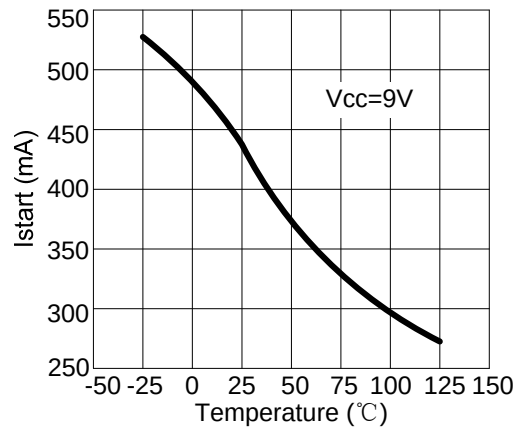

I_{CC} Temperature Drift

